

SENCO[®]MAKING HARD WORK
EASIER

Applications

For on-site, manufactured housing, including framing, sheathing, decking, subflooring, and exterior decks. Also, industrial markets such as heavy-duty pallet construction, pallet repair, and crate and box assembly

Features & Benefits


- Up to 25% more power for superior performance
- Balanced weight for one-handed operation
- High load capacity (up to 275 nails)
- Fast cycle time increases productivity
- Adjustable depth-of-drive control for just the right countersink
- E-Z load design saves time

Coilnailer

Technical specifications

Dimension (LxWxH)	327x137x359 mm
Net weight	3.6 kg
Firing mode	Dual
Air inlet	3/8" female NPT
Operating pressure	4.8 - 8.3 bar
Air consumption (at 60 shots per minute)	270 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	93 dB
Sound power level (Lwa)	102 dB
Vibration level	3.68 m/s ²
Magazine capacity	275 pieces
Collation type 1	Wire collated
Collation angle	15 °

Fastener specification

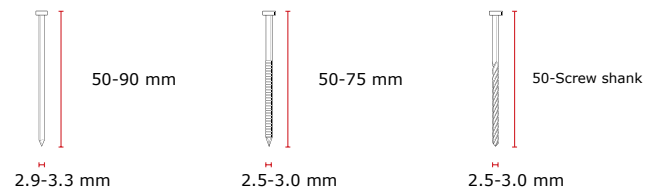

Description

SCN65XP, coilnailer

Art. Nr.

542001N

EAN code

0741474302244